



made for business

BANLIGHT DUO FR

Vertical & Roller Blind Fabric Specification

BANLIGHT DUO FR
FIRE RETARDANT
ANTI-MILDEW COATING
BLACKOUT FABRIC

BANLIGHT DUO FR 240cm & 300cm
WIDE WIDTH
FIRE RETARDANT
ANTI-MILDEW COATING
BLACKOUT FABRIC



BANLIGHT DUO FR

Vertical & Roller Blind Fabric Specification

KEY FEATURES:

Fabric composition:	100% Polyester
Fire retardancy:	Conforms to; EN 13773 : 2003 Class 1; BS5867 - 2, Type B : 2008 for fire retardancy when tested in accordance with BS5438 : 1989
Shading:	Block-out - Recommend for computer environments
Moisture resistance:	Acticide Coated - Suitable for moist conditions



STANDARD SPECIFICATIONS:

Colour range:	30
Louvre widths available:	89mm (3 ^{1/2} "); 127mm (5")
Roller fabric widths:	200cm: nominal (78.7"); 240cm: nominal (94.5"); 300cm: nominal (118.1")
Typical fabric weight:	330gsm - (+/-10)
Fabric thickness:	0.45mm - nominal
Colourfast:	Conforms to: BS5867 - 1 : 2004 for light fastness to Grade 6 minimum when tested in accordance with ISO 105 - B02 : 1999
Care instructions:	Wipe with damp sponge; Do not wash; Do not tumble dry; Do not Dry Clean; Do not iron

Colour	%Heat		%Light		S-C	Colour	%Heat		%Light		S-C
	T	R	T	R			T	R	T	R	
Anthracite	0	11	0	11	0.77	Iron	0	51	0	54	0.43
Baby Lavender	0	50	0	39	0.44	Linen	0	60	0	67	0.35
Biscotti	0	62	0	61	0.33	Marina	0	16	0	13	0.73
Black	0	4	0	4	0.84	Navy	0	9	0	6	0.79
Bright White	0	70	0	83	0.26	Pale Grey	0	50	0	43	0.44
Calico	0	66	0	75	0.29	Pearl	0	64	0	67	0.31
Charcoal	0	12	0	12	0.77	Redcurrant	0	13	0	30	0.76
Concrete	0	18	0	19	0.72	Sand	0	37	0	39	0.55
Cream	0	67	0	75	0.29	Smokey Blue	0	47	0	49	0.46
Desert Sage	0	44	0	37	0.49	Stone Grey	0	50	0	55	0.43
Dijon	0	44	0	42	0.49	Taupe	0	47	0	32	0.46
Glacier Blue	0	24	0	8	0.66	Teal	0	28	0	26	0.63
Green	0	45	0	40	0.48	Ultimate Grey	0	41	0	29	0.51
Grey	0	40	0	41	0.52	Vanilla	0	61	0	72	0.34
Iris	0	15	0	9	0.74	White	0	69	0	82	0.27

This data is based on: Tests conducted using double glazed 6mm float glass with 12mm air space. Blinds are fully closed.

Shading co-efficients are calculated for radiation at normal incidence. Standard U value is 2.75 W/M2K = 0.49Btu/ft2hxF.


Important: Performance data has been compiled with great care using the latest techniques. However it is advisable to check actual suitability of fabrics for a particular application before use.

In line with Eclipse's commitment to product development, specifications may be subject to change without notice.


T = Transmitted : R = Reflected : S-C = Shading Co-efficient. Shading Co-efficients are expressed as a decimal between 0 and 1. The lower the figure, the higher the shading efficiency of the blind.




Bright White

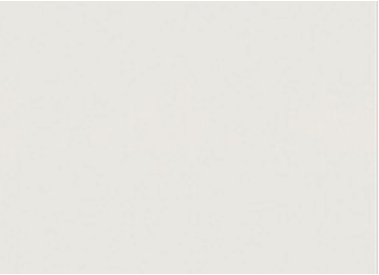


White

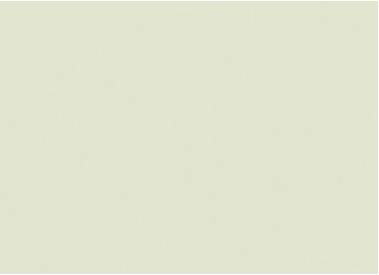

Calico

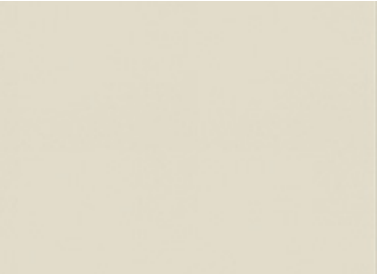


Cream

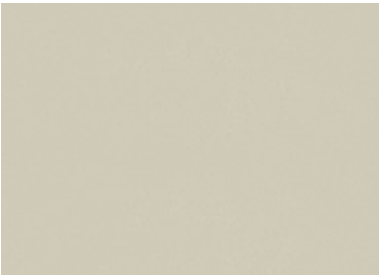


Vanilla




Linen

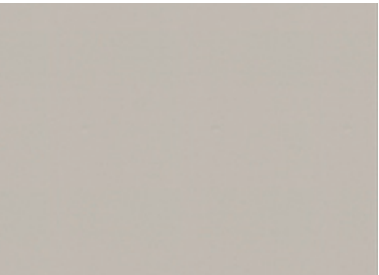

Stone Grey

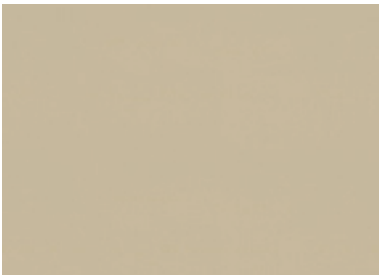


Biscotti

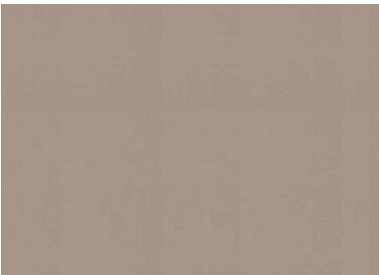

Sand



Taupe

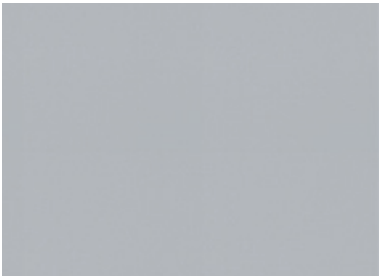

Iron



Pale Grey



Grey




Ultimate Grey



Concrete



Charcoal

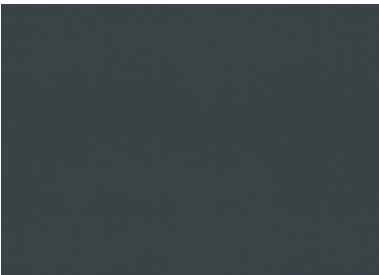

Anthracite



Black



Dijon




Redcurrant



Pearl



Baby Lavender

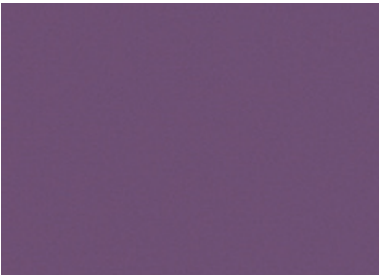

Iris



Smokey Blue



Marina




Glacier Blue



Navy



Teal

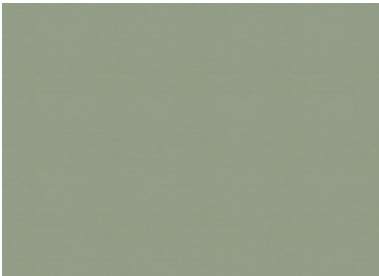

Desert Sage



Green

* All colours are available in 2m, 2.4m and 3m roller widths.