

PALETTE FR
Vertical & Roller Blind Fabric Specification

PALETTE FR
FIRE RETARDANT
ANTI-MILDEW COATING

PALETTE FR 240cm & 300cm
WIDE WIDTH
FIRE RETARDANT

PALETTE FR

Vertical & Roller Blind Fabric Specification

KEY FEATURES:

Fabric composition:	100% Recycled Polyester
Fire retardancy:	Conforms to; EN 13773 : 2003 Class 1; BS5867 - 2, Type B : 2008 for fire retardancy when tested in accordance with BS5438 : 1989
Shading:	Standard - Suitable for computer environments
Openness:	As a closed weave fabric, Palette is not engineered to have an Openness Factor. For the purposes of Specification the OF% can be regarded as Zero.
Moisture resistance:	Acticide Coated - Recommended for moist conditions



STANDARD SPECIFICATIONS:

Colour range:	30
Louvre widths available:	89mm (3 ^{1/2} "); 127mm (5")
Roller fabric widths:	200cm: nominal (78.7"); 240cm: nominal (94.5"); 300cm: nominal (118.1")
Typical fabric weight:	265gsm - (+/-10)
Fabric thickness:	0.35mm - nominal
Colourfast:	Conforms to; BS5867 - 1 : 2004 for light fastness to Grade 6 minimum when tested in accordance with ISO 105 - B02 : 1999
Care instructions:	Wipe with damp sponge; Do not wash; Do not tumble dry; Do not Dry Clean; Do not iron

Colour	%Heat		%Light		S-C	Colour	%Heat		%Light		S-C
	T	R	T	R			T	R	T	R	
Anthracite	0	11	0	11	0.79	Iron	10	51	7	54	0.44
Baby Lavender	11	57	3	41	0.39	Linen	17	62	15	70	0.35
Biscotti	10	53	8	56	0.42	Marina	10	39	1	15	0.54
Black	0	5	0	6	0.83	Navy	0	5	0	6	0.82
Bright White	22	70	21	79	0.29	Pale Grey	11	56	4	45	0.40
Calico	20	67	19	75	0.31	Pearl	19	64	16	62	0.34
Charcoal	0	12	0	12	0.77	Redcurrant	13	45	1	16	0.49
Concrete	1	18	0	18	0.71	Sand	7	42	3	43	0.51
Cream	19	65	17	73	0.33	Smokey Blue	14	58	10	60	0.38
Desert Sage	9	50	1	37	0.45	Stone Grey	10	51	7	54	0.44
Dijon	12	52	5	41	0.43	Taupe	11	46	2	27	0.48
Glacier Blue	7	29	0	9	0.66	Teal	10	46	2	34	0.48
Green	7	41	3	41	0.52	Ultimate Grey	9	46	1	28	0.48
Grey	12	53	3	39	0.43	Vanilla	15	67	12	70	0.31
Iris	1	15	0	9	0.74	White	21	69	20	78	0.30

This data is based on: Tests conducted using double glazed 6mm float glass with 12mm air space. Blinds are fully closed.

Shading co-efficients are calculated for radiation at normal incidence. Standard U value is 2.75 W/M2K = 0.49Btu/ft2hxF.


Important: Performance data has been compiled with great care using the latest techniques. However it is advisable to check actual suitability of fabrics for a particular application before use.

In line with Eclipse's commitment to product development, specifications may be subject to change without notice.


T = Transmitted : R = Reflected : S-C = Shading Co-efficient. Shading Co-efficients are expressed as a decimal between 0 and 1. The lower the figure, the higher the shading efficiency of the blind.




Bright White

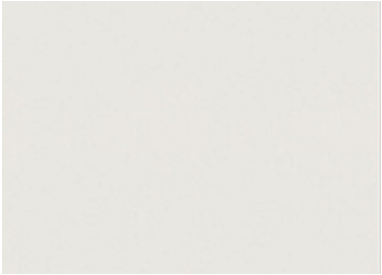


White

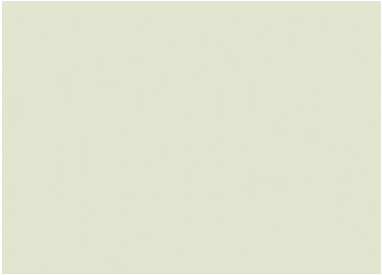


Calico

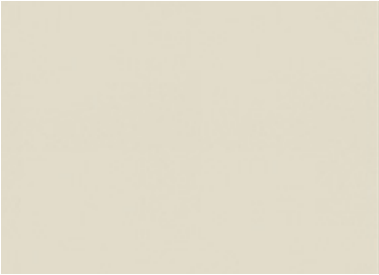


Cream

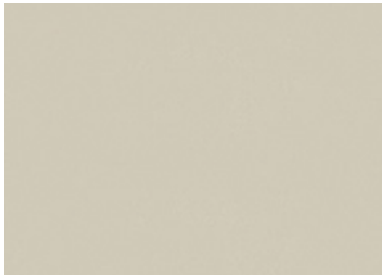


Vanilla

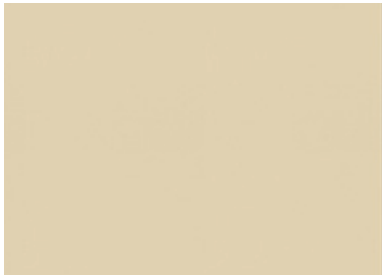


Linen

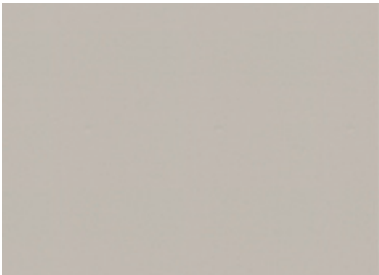

Stone Grey

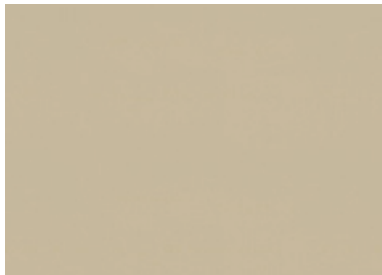


Biscotti

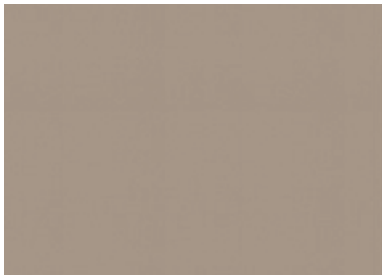

Sand



Taupe

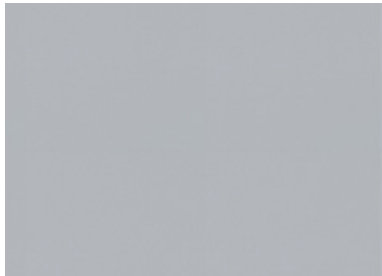

Iron



Pale Grey



Grey




Ultimate Grey



Concrete



Charcoal

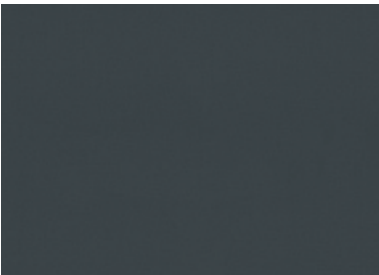

Anthracite



Black



Dijon




Redcurrant



Pearl



Baby Lavender

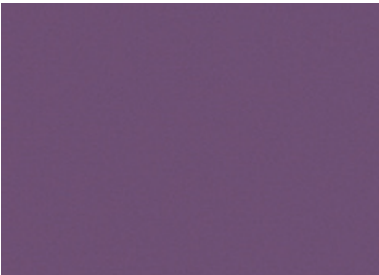

Iris



Smokey Blue



Marina




Glacier Blue



Navy



Teal

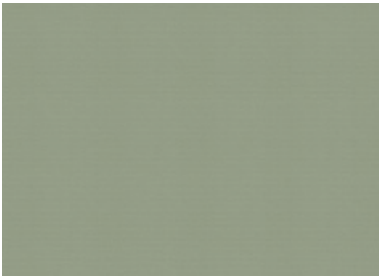

Desert Sage



Green

* All colours are available in 2m, 2.4m and 3m roller widths.